

# LCA OF ARC 30HT DYEING MACHINE



*In collaboration with*



*the innovation consulting partner*

## Goal of the study

The application of the study is to assess the energetic and environmental impacts of ARC HT machine along the entire life cycle, comparing standard and innovative predefined processes. Goal of this study is to assess the environmental impact of the chosen product, considering the CO<sub>2</sub>, the embodied energy and other impacts as described in LCIA scope settings.

Two machines are object of the analysis:

- ARC 30HT Standard
- ARC 30HT Innovative – 2015 Version

Boundary limits, functional units and any other point useful for contextualize the report will be properly defined in following chapters.

### **WHAT IS AN LCA?**

**Life Cycle Assessment (LCA)** is a compilation and evaluation of the inputs, outputs and the potential environmental impacts of a product system throughout its life cycle.

Life Cycle Assessment is a structured, comprehensive and internationally standardized method, used to quantify all relevant emissions and resources consumed by a good or service and their related impact on environment, human health and resources depletion.

The LCA study is performed in accordance with internationally recognized guidelines (ILCD Handbook: General guide for Life Cycle Assessment - Detailed guidance”) and standards (ISO 14044:2006 and ISO 14040:2006) main requirements that identifies a series of steps, i.e.:

1. LCA goal & scope definition
2. Inventory analysis (LCI)
3. Impact assessment (LCIA)
4. Interpretation



## Scope of the study

Several considerations and assumptions were made in order to define the details of the model to be developed. The scope of this study is to provide data to evaluate sustainability performances of ARC 30HT FLAINOX in a cradle to grave analysis.

As a result, the LCA considers the relevant phases of the life cycle of the product, i.e. the cradle-to grave concept: the analysis starts with the extraction of raw materials, materials and components' production from different suppliers located in several geographical areas. The components are then further processed in FLAINOX facilities in Quaregna (BI). Moreover the LCA approach covers all manufacturing operations, performed in function of the final objective, the sale of dyeing machine to a textile company and its following operational life. The analysis covers also the disposal/re-use/recycling of all elements both generated during the production and use phases: all these phases will be accounted. This will be possible thanks to information provided by FLAINOX to LCA practitioners.

### Function, functional unit and reference flow

The entire life cycle of ARC 30HT since raw materials providing until final dismantling, through manufacturing and use phases (able to perform 49625 cycles), has been adopted as the functional unit: the ARC 30HT with a mass of around 1900 kg and an useful lifetime of 20 years. The choice is useful for simplifying data elaboration and the understanding of the different involved processes. In the use phase a defined and repeatable dyeing process will be assessed, according to specific customer information provided to Flainox.

Moreover also the ARC 8HT is going to be assessed, through a conversion table created from ARC 30HT results.



The ARC HT is an open-pocket rotatory machine at high temperature for the dyeing, washing and centrifuging of garments, socks and seamless, manufactured in Quaregna, Biella, Italy and exported as final product all over the world. Flainox in fact has a wide customer network in Asia, Africa and America.

Also the dismantling phases will be assessed, taking into account that three options are possible:

- dismantling on site;
- return to Flainox and dismantling in its facilities;
- sale of machine to a third part, losing the control of the machine itself.

### **Modelling framework**

Given the previously defined goal and scope and following the rules provided under ISO 14044:2006, a Life Cycle Impact Assessment has to be carried out.

In the analysis considering that preliminary results affirmed that use phase weights over 99% of total life cycle, the manufacturing processes for machine have been considered equal for standard and innovative products.

Besides after production chain, the operation of machine, which takes place in a define textile dyeing company, have to be taken into account, in order to have the widest vision of the machine life cycle and considering that it covers almost the global impact of life cycle.

### **System boundaries**

The LCA is conducted on "Cradle to Grave" basis. The production, the use (maintenance and operation) and end-of-life phase for the ARC HT machine is taken into account.

Temporal boundaries shall be taken into account, because the process of production of single components is characterized by different times.




After that there are the use phase and maintenance operations. The reference cycle, used also for evaluation of consumptions, is realized in an European factory: so the chosen location for installation is Europe, but of course Flainox ARC HT machines are purchased, installed and used also outside Europe, mainly Africa and Asia. The expected lifetime is 20 years.

All the phases last different periods: it could be assumed that the entire cycle until installation is covered in 1 year. These assessments are surely generic because they do not take into account the specific production process of a company and its real timing of activities but they could be considered quite factual. Besides this choice warrants to the analysis a solid background bypassing any type of problem linked to the collection of data.

Instead for the definition of geographic borders it is important to notice that it covers Europe, as previously defined and in accordance with reference cycle used for calculations, which is performed by a European factory. The ARC 30HT is also sold to non-European customers.

Figure below schematically depicts the steps considered in the analysis and is valid for the both products. Raw materials are extracted and processed before reaching the mills of different suppliers, where the single components are produced. Then they are assembled and require further manufacturing operations by Flainox and finally installed in the chosen dyeing industry. The product is then used by consumers throughout its life and finally dismantled. Transport and energy supply support all the processes in the system boundary.



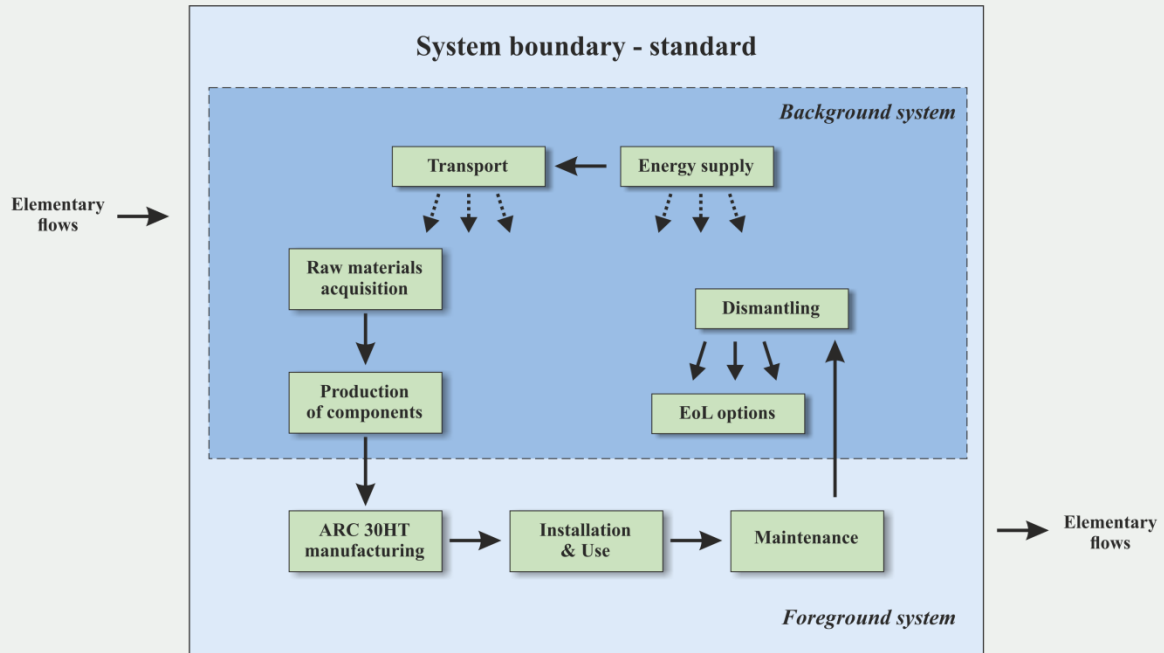

## LCA General Model with Boundaries and Flows



## Life Cycle Inventory analysis

The Inventory analysis is the LCA phase that involves the compilation and qualitative/quantitative identification of inputs and outputs for a given product system throughout its life cycle or for a single processes. The inventory analysis includes iterative data collection and the compilation of the data in a Life Cycle Inventory (LCI) table.

The Life Cycle Inventory model has been implemented through dedicated software, namely GaBi 6.

The five main phases of ARC HT machine are:

- raw materials purchase (same for two ARC 30HT versions);
- assembly and manufacturing operations (same for two ARC 30HT versions);
- transport to customer (same for two ARC 30HT versions);
- use phase (different for two ARC 30HT versions);
- dismantling (according to the three analysed options, same for two ARC 30HT versions).

For each one of them, through collected data, a plan on GaBi 6 has been created: considering the two different processes, standard and innovative.



The ARC 30HT is an open-pocket rotatory machine at high temperature for the dyeing, washing and centrifuging of garments, socks and seamless, which is available in several configurations according to the specific customer requests.



**ARC 30HT**



## ARC 30HT – Technical Data

<b>Nominal Load</b>		kg	30
<b>Number of compartments</b>		n.	1
<b>Usable drum volume</b>		L	650
<b>Average power absorbed</b>		kW	4
<b>Peripheral speed during centrifuge</b>		m/s	28
<b>Machine width and depth</b>		mm	2000
			1670
<b>Total height</b>		mm	2200
<b>Weight</b>	<b>Machine</b>	kg	1194
	<b>Basket</b>	kg	344
	<b>Service group</b>	kg	249
	<b>Electrical panel</b>	kg	114
<b>Max working temperature at sea-level</b>		°C	135

The machines can be tuned by customers according to its experience, required product quality parameters, textile substrates and needed chemicals.

So a standard reference cycle does not exist and in the following LCA analysis, the practitioners have performed the assessment based on a specific process defined by one of Flainox customers. Each customer can tune the machine according specific requirements.

In the study some boundary conditions have been set in order to evaluate same cycle performed by different machine versions. Results will be provided within this framework; if boundary conditions will change, models and results should be revised.



In detail all the energy and material consumptions for use phase will be referred to ARC 30HT machine used for dyeing 30 kg of polyamide stockings in blue/black.

The standard and innovative cycles will be compared in terms of processes and relative consumptions, across the 20 years of useful lifetime.

The standard process has a minimum water level of 400 litres of water for ARC 30HT (levels with wet material), against the innovative process – 2015 with a minimum water level of 100 litres of water for ARC 30HT (levels with wet material). Standard process takes 3,5 hours to complete the cycle, against 3,25 hours of innovative process. So considering 7 working days per week and 48 working weeks per year, standard machine will perform 46080 cycles against 49625 of the innovative one. In conclusion to perform the same number of cycles, taking as reference the innovative machine, 1,08 standard machines are needed to have 49625 cycles.

The other life cycle steps have been accounted but they have been considered equal for both solutions:

- manufacturing;
- assembly;
- transport;
- maintenance;
- End of Life.

After the comparison between two processes realized inside ARC 30HT, through normalization factors, the results have been extended to ARC 8HT.

For this machine, the goal of the system is the same (dyeing polyamide stocking in blue/black) but the load is 8 kg (factor: 0,27).



## Life cycle impact assessment

The Life Cycle Impact Assessment (LCIA) identifies and evaluates the amount and significance of the potential environmental impacts arising from the LCI. Inputs and outputs are assigned to impact categories and their potential impacts quantified according to characterization factors. There are different methods that can be used to perform a LCIA.

<b><i>Impact category</i></b>	<b><i>Units</i></b>
Global Warming Potential	[kg CO <sub>2</sub> -Equiv.]
Ozone Depletion Potential	[kg CFC 11-Equiv.]
Particulate/matter respiratory inorganics	[kg PM 2,5 Equiv.]
Acidification Potential	[mol H <sup>+</sup> - Equiv.]
Resource depletion, mineral fossil	[kg Sb. - Equiv.]
Ecotoxicity	[CTUe]
Human Toxicity (carcinogenic)	[CTUh]
Human Toxicity (non-carcinogenic)	[CTUh]
Ionizing Radiation	[kg U235 eq]
Photochemical Ozone Creation Potential	[kg NMOVC.]
Eutrophication Potential (EP) – freshwater and marine	[kg P/N - Equiv.]
Water depletion	kg
Terrestrial Eutrophication	[mol N - Equiv.]
Primary energy demand from ren. and non ren. Resources	MJ



Analysing the results some considerations can be done:

- the reduction is evident comparing Standard Life Cycle with Innovative 2015 Life Cycle. This decrease shows the **persistent efforts** which Flainox is performing for **pursuing the continuous reduction of environmental impacts of their machines**;
- globally the **innovative process of 2015** (considering equal in terms of absolute values the other phases) generates a benefit compared to standard process. These benefits (calculated for the entire machine life cycles) vary from a **reduction of 8% for Resource Depletion** compared to standard until a reduction of **over 70% for Water Footprint** compared to standard. The reductions are so due to technological implementations brought in terms of machine design and setting optimization which generate a reduction in terms of use of water, energies and chemicals;
- the contribution of use phase, compared to other ones is evident and it overcomes the 90% in almost the indicators. The raw materials are responsible only for Ecotoxicity and Resource Depletion for over around the 30% of total value, and for Freshwater Eutrophication and Human Toxicity non canc. Effects for over around the 20% (the use of steel materials in manufacturing operations is the main responsible).




## Results Comparison

In order to have a more detailed view of the results, some bar charts, starting from previous results have been created. In particular the next analysis is focused on six indicators:

- **Freshwater eutrophication**, due to the high amount of water used it is necessary evaluate the benefit due the reduction of this source in new process especially focus on the effects of waste water into environment;
- **Global Warming Potential** – Carbon Footprint which is usually one of the most easy to understand indicators and it evaluate the emission of greenhouses gases;
- **Ozone Depletion** in order to evaluate the burdens on ozone hole effect;
- **Resource Depletion** which is one of the two indicators where Raw Materials have a noticeable impact;
- **Freshwater consumption** – Water Footprint due to the use of high amount of water for operations;
- **Primary Energy Demand** which evaluated the Gross Energy Requirements along the entire systems life cycles.



## Freshwater eutrophication, EUTREND model, ReCiPe

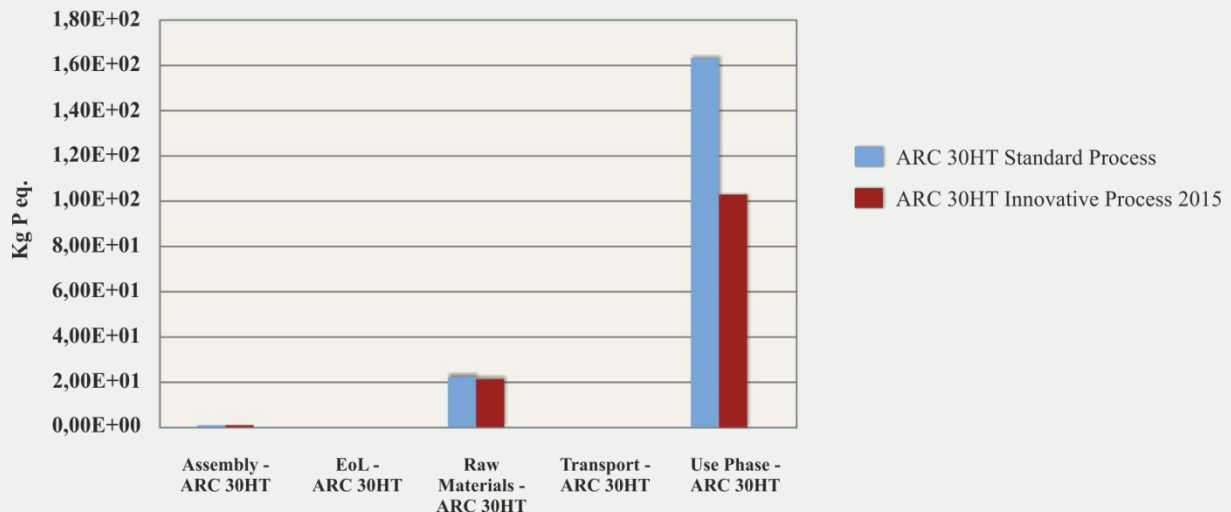


## Freshwater Eutrophication – Phases Comparison

Use phase is the main contributor. There is a reduction of around 36% from standard to innovative process 2015 (use phase). Absolute values of raw materials impacts still remain the same, except the increase of standard column due to the slower dyeing cycle, which requires 1,08 machines for performing 49625 cycles.



## IPCC global warming, inc biogenic carbon

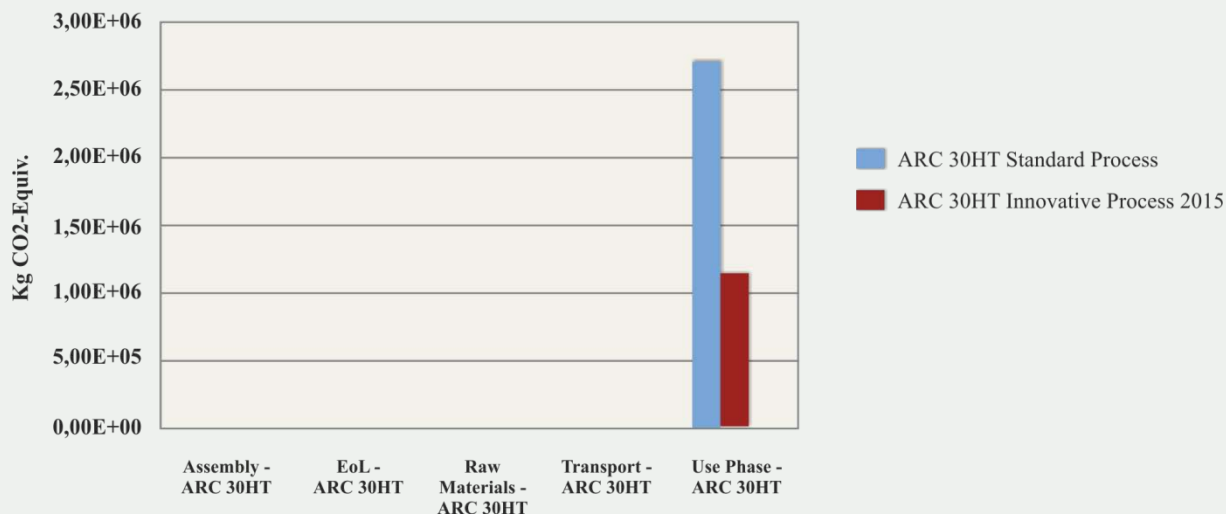


## Global Warming Potential – Phases Comparison

Decreases of 61% from standard to innovative process 2015 are present in use phase impacts for carbon footprint. Other contributions are negligible.



## Ozone depletion, WMO model, ReCiPe

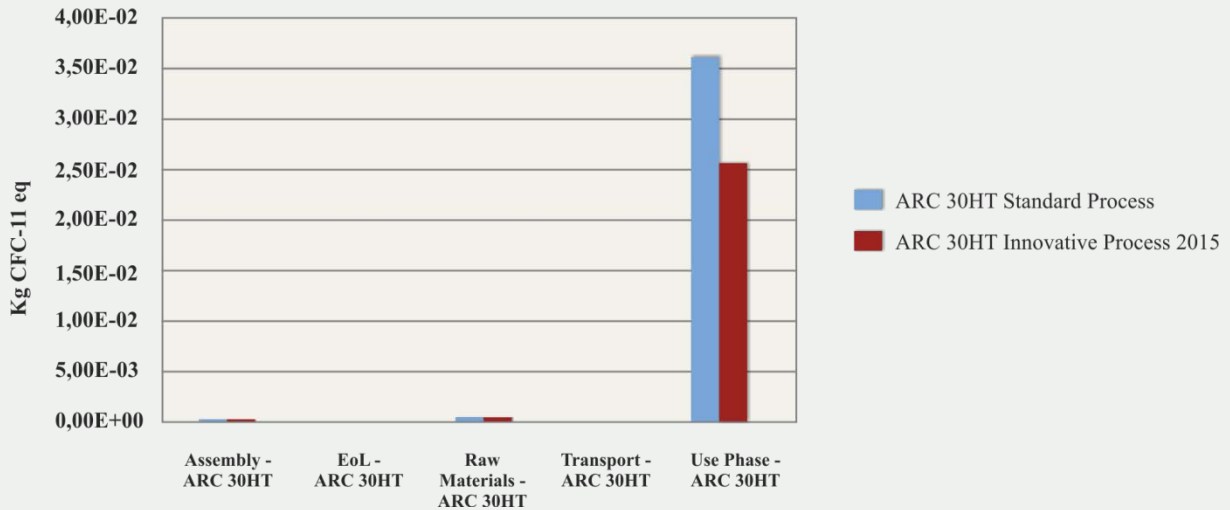


## Ozone Depletion – Phases Comparison

The only evident contributor is the use phase. Passing from old to new process there is a reduction of 28%.



## Resource Depletion, fossil and mineral, reserve Based, CML2002

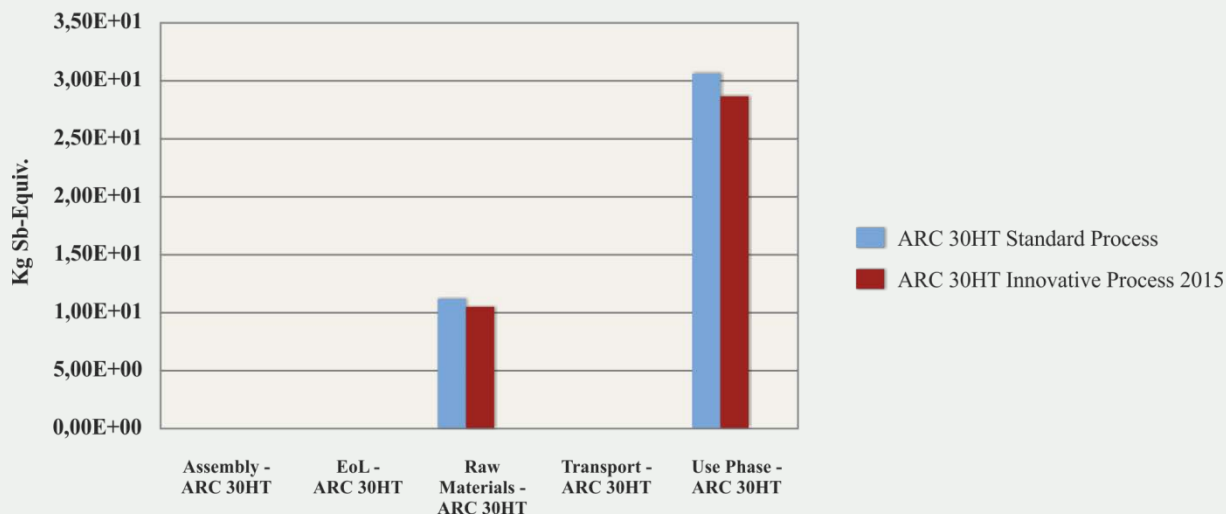


## Resource Depletion – Phases Comparison

As regards Resource Depletion the benefit of new dyeing process is partially weakened by the raw materials contribution. A reduction is of course present but with a percentage referred to use phase of only 9%.



## Total freshwater consumption, including rainwater, Swiss Ecoscarcity

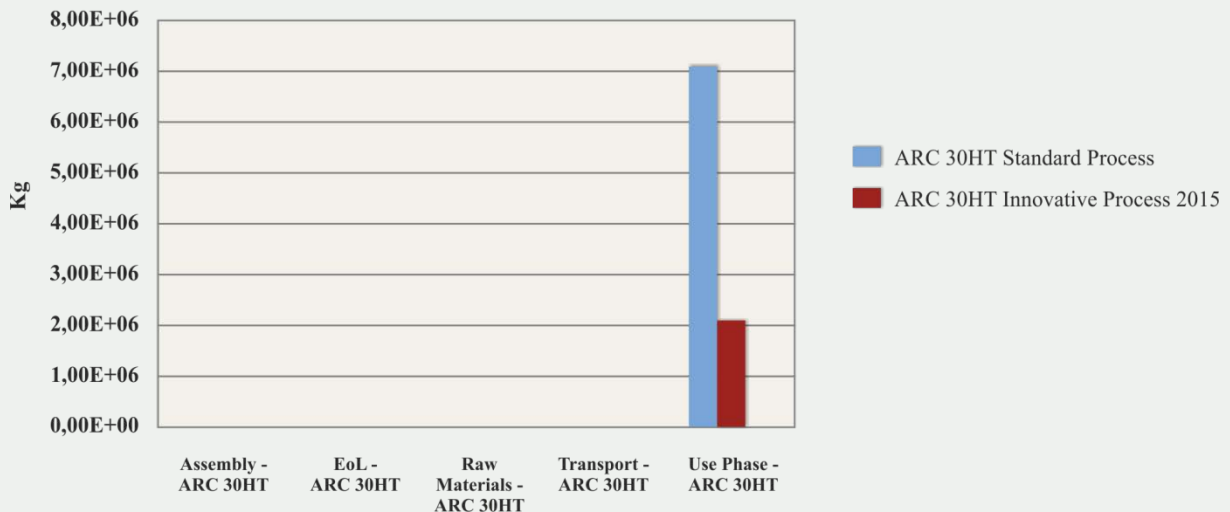


## Freshwater Consumption – Phases Comparison

The benefits of the new dyeing process are very high also in water footprint. The complete reduction is over 70%, compared to standard process realised for 20 years. There is a correspondent benefit also on eutrophication: less water consumed implies less water to wastewater treatment plant.



## Primary energy demand from ren. and non ren. resources (gross cal. value)

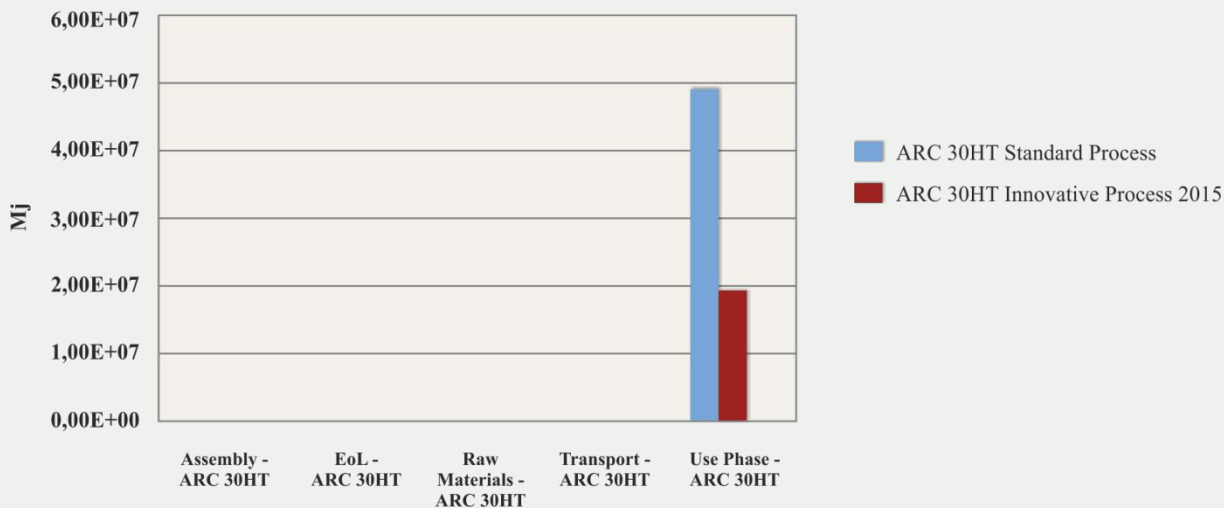

## Primary Energy Demand – Phases Comparison

Finally also for use phase it is important the benefit due to the new process with a reduced minimum water level for dyeing process, that implies a reduction of thermal energy. In use phase the reduction of this indicator is around 60%.



## CONCLUSIONS

This LCA study has been performed by D'Appolonia in accordance with main requirements of international standards (ISO 14040:2006 and 14044:2006) and internationally recognized guidelines (i.e. ILCD Handbook: General guide for Life Cycle Assessment - Detailed guidance).

The report provides indications on the environmental footprint on one of the main products of Flainox catalogue, the ARC 30HT. The benefits linked to the introduction of a new process have been evaluated and are evident, starting from the premise that the use phase in such kind of machine has an impact much higher than other life cycle phases.

As references, one cycle has been used, i.e. the standard one. Starting from this one, the Company has further worked on enhancing dyeing process in terms of environmental performances, with the result of a new Innovative Process in 2015.

Globally the **innovative process set in 2015** (considering equal in terms of absolute values the other phases) generates noticeable benefits compared to standard process. These benefits (calculated for the entire machine life cycles) vary from a **reduction of 8% for Resource Depletion** until a reduction of **over 70% for Water Footprint**.

The positive results achieved through the introduction of the new process show the great attention of Flainox to the issue of the environmental sustainability.

Indeed, the Policy of the company is oriented towards a continuous reduction of the environmental impacts generated by its dyeing machines.

70% decreasing of the Water Footprint is extremely significant, considering the cost and the possible shortage of water.

In fact, the reduction of the amount of water consumed during the process means a consequent reduction of the quantities of chemicals and thermal energy involved.

Moreover, the above mentioned reduction results in savings of the operational costs of the dyeing process. These benefits are not only for Flainox, but also for the user of the machinery and the local community, since it permits to save water that can be utilized for other uses, other than the dyeing ones, and less waste water needs to be treated before being released into environment.



## References

DG JRC/IES, 15ILCD Handbook, 2011.

Ecoinvent Converted ecoinvent 1.01 data as unit processes with links to other processes, including uncertainty data, The Swiss centre for Life Cycle Inventories, 2000.

Flainox, Internal Documentation related to materials and energy consumptions, waste produced, 2013 [D'Appolonia Internal Reference: 15-522-B1 and G1].

Flainox, Internal Documentation on Machine Consumptions, 2013 [D'Appolonia Internal Reference: 15-522-B1 and G1].

Flainox, Internal Documentation on Machine Consumptions, 2015 [D'Appolonia Internal Reference: 15-522-B1 and G1].

ISO and SETAC Europe (modified from Heijungs & Hofstetter), Terminology used in life cycle assessment as defined by (ISO, 1997a; 1997b; 1997d), 1996.

Institute of Environmental Sciences, Leiden University, The Netherlands: Handbook on impact categories "CML 2001 ", 2001.

Institute of Environmental Sciences, Leiden University, The Netherlands: "Life Cycle Assessment, An operational guide to the ISO standards, Volume 1, 2 and 3", 2001.

IPCC, Climate change 2007. Impacts, adaptations and mitigation of climate change: Scientific and technical analysis. Intergovernmental Panel on Climate Change, Cambridge, University Press, New York, 2008.

ISO 14040:2006, Environmental management -- Life cycle assessment -- Principles and framework, 2006.

ISO 14044:2006, Environmental management -- Life cycle assessment -- Requirements and guidelines, 2006.

ReCiPe 2008 A life cycle impact assessment method which comprises harmonised category indicators at the midpoint and the endpoint level Mark Goedkoop, 6 January 2009.



## Results for ARC 8HT

Starting from impacts obtained for ARC 30HT, a conversion has been conducted in order to evaluate the impacts only of the Use Phase of a different model of the same series ARC HT, ARC 8HT.

The Use Phase (both standard and innovative) is the main impacting one and the results for standard and innovative ARC 30 HT processes (49625 cycles) have been converted for ARC 8 HT, through a factor, i.e. 0,27.

The results, including the **Use Phase** only, are presented in the following tables.

INDICATOR	ARC 8HT		Reference Unit
	Standard	Innovative 2015	
Acidification, accumulated exceedance	2,363E+03	1,193E+03	[Moles of H+-Equiv.]
Ecotoxicity for aquatic fresh water, USEtox	6,072E+05	3,896E+05	[CTUe]
Freshwater eutrophication, EUTREND model, ReCiPe	4,446E+01	2,862E+01	[kg P eq]
Human toxicity cancer effects, USEtox	1,512E-02	8,343E-03	[CTUh]
Human toxicity non-canc. effects, USEtox	5,923E-02	2,988E-02	[CTUh]
Ionising radiation, human health effect model, ReCiPe	1,383E+07	9,987E+06	[kg U235 eq]
IPCC global warming, incl biogenic carbon	7,183E+05	2,781E+05	[kg CO2-Equiv.]



Marine eutrophication, EUTREND model, ReCiPe	1,088E+02	4,873E+01	[kg N-Equiv.]
Ozone depletion, WMO model, ReCiPe	9,805E-03	7,098E-03	[kg CFC-11 eq]
Particulate matter/Respiratory inorganics, RiskPoll	1,995E+02	9,734E+01	[kg PM2,5-Equiv.]
Photochemical ozone formation, LOTOS-EUROS model, ReCiPe	1,600E+03	6,230E+02	[kg NMVOC]
Resource Depletion, fossil and mineral, reserve Based, CML2002	8,247E+00	7,539E+00	[kg Sb-Equiv.]
Terrestrial eutrophication, accumulated exceedance	6,147E+03	2,509E+03	[Mole of N eq.]
Total freshwater consumption, including rainwater, Swiss Ecoscarcity	1,950E+06	5,803E+05	[kg]
Primary energy demand from ren. and non ren. resources (gross cal. value)	1,330E+07	5,256E+06	[MJ]





**Flainox S.r.l.**  
**Via Leopardi, 5**  
**13854 Quaregna (Biella)**  
**+39 015 980680**  
**[info@flainox.com](mailto:info@flainox.com)**  
**[www.flainox.com](http://www.flainox.com)**

